


# C530

## GPGPU 3U VPX AI Board

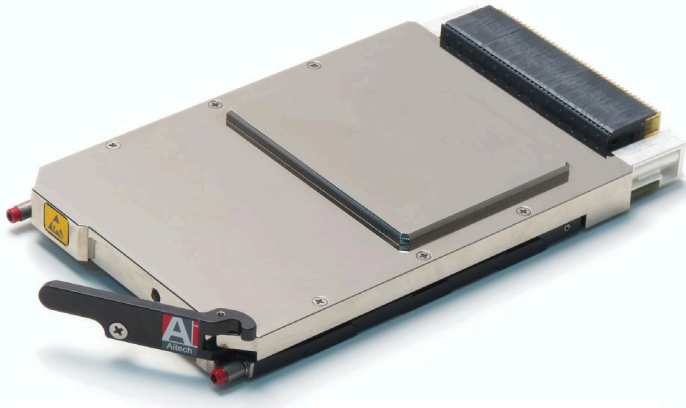

The updated C530 multi-head GPGPU is the most powerful AI (Artificial Intelligence) enabled 3U VPX GPGPU board, providing remarkable performance in a compact and rugged form factor.

Available with powerful NVIDIA GPU options based on the latest Turing architecture, the C530 is ideally suited for AI Delivery, Video Analytics, Image Processing, and many other applications.

The RTX3000 includes 1920 CUDA Cores for parallel processing, 240 Tensor Cores for AI inference, and 30 RT Ray-Tracing Cores for real time rendering.

POWERED BY



**RuggedAI™ is Aitech**

- Rugged 3U VPX Form Factor
- NVIDIA® Quadro® GPU Options
  - ▶ NVIDIA® Quadro® RTX3000
    - Turing™ Architecture
    - 1920 CUDA® Cores
    - 30 RT Cores
    - 240 Tensor Cores
    - 5.3 TFLOPS (FP32)
    - 6 GB GDDR6
    - 80 W Max Power
  - ▶ NVIDIA® Quadro® T1000
    - Turing™ Architecture
    - 896 CUDA® Cores
    - 50 W Max Power
    - 2.6 TFLOPS (FP32)
    - 4 GB GDDR6
- CUDA®, OpenCL, OpenGL, DirectX 12
- 4 Video Output Channels
- PCIe x16 Gen3 Host Interface
- OpenVPX Compliant
- Windows®, Linux® Support
- 2LM Option per VITA 48.2
- Conduction-Cooled
- Vibration and Shock Resistant



[www.aitechsystems.com](http://www.aitechsystems.com)

# C530

## GPGPU 3U VPX AI Board




The parallel processing capabilities of today's multi-core GPUs make them ideal for both non-graphics and graphics applications with intensive computation requirements. Aitech's C530 General Purpose GPU (GPGPU) board provides these capabilities, as well as high-performance graphics rendering capabilities and multiple video output channels, in a rugged 3U VPX form factor.

In addition to the increased throughput offered by parallel processing, GPGPU computing also allows the CPU and OS to remain responsive even when the system is under a heavy load, by offloading the intensive operations to the GPU. GPGPU application development can be performed on a standard PC that is equipped with a GPU of the same architecture.

The C530 hosts an MXM GPU module (standardized GPU form factor), and new configurations of the C530 are released as higher-performance MXMs become available. The C530 currently supports the NVIDIA® Quadro® RTX3000 and NVIDIA® Quadro® T1000 GPUs.

The C530 operates as a peripheral board with a compatible x86 VPX host SBC, such as Aitech's C874 (5<sup>th</sup> Gen. Intel® Core™ i7), C875 (8<sup>th</sup> Gen. Intel® Xeon® E), and C877 (Intel® Xeon® D) 3U VPX SBCs. The C530 and the host SBC interconnect over the VPX backplane, via a high speed PCIe Gen3 link of up to 16 lanes.

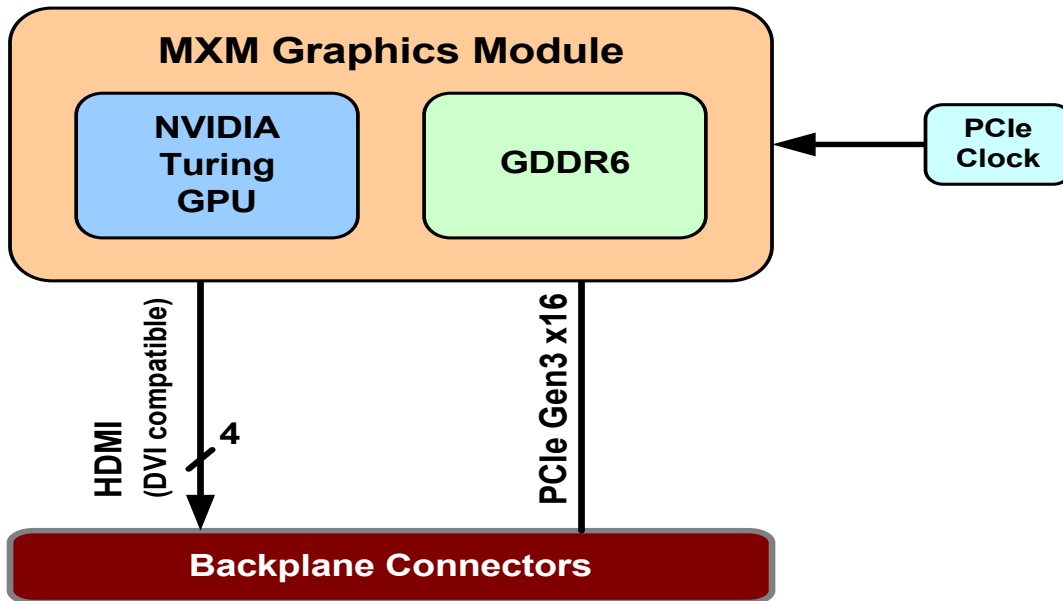

# C530

## GPGPU 3U VPX AI Board



### Board Architecture

<b>MXM Site</b>	Supports a single MXM 3.1 Type B/Type A module
<b>MXM GPU</b>	<ul style="list-style-type: none"><li>• NVIDIA® Quadro® RTX3000 Option<ul style="list-style-type: none"><li>▪ Turing Architecture</li><li>▪ 6 GB GDDR6</li><li>▪ 1920 CUDA Cores</li><li>▪ 30 Ray-Tracing RT cores</li><li>▪ 240 Tensor Cores</li><li>▪ 5.3 TFLOPS (FP32)</li><li>▪ 336 GB/s memory bandwidth</li><li>▪ 192-bit Memory Interface Width</li></ul></li><li>• NVIDIA® Quadro® T1000 Option<ul style="list-style-type: none"><li>▪ Turing Architecture</li><li>▪ 4 GB GDDR6</li><li>▪ 896 CUDA Cores</li><li>▪ 2.6 TFLOPS (FP32)</li><li>▪ 192 GB/s memory bandwidth</li><li>▪ 128-bit Memory Interface Width</li></ul></li><li>• CUDA, CUDA Compute, OpenCL, OpenGL, DirectX 12, Vulkan</li><li>• Dynamic clock frequency</li></ul>
<b>PCIe Interface</b>	<ul style="list-style-type: none"><li>• PCIe x16 Gen3 port for connection to host SBC over the VPX backplane</li><li>• 100 MHz PCIe reference clock generated on-board</li><li>• Signals mapped to P1 connector per VITA 46.4</li></ul>
<b>OpenVPX (VITA 65) Slot Profiles</b>	The PCIe interface supports the following OpenVPX peripheral slot profiles <ul style="list-style-type: none"><li>• SLT3-PER-1F (1 Fat pipe)</li><li>• SLT3-PER-1U (1 Ultra-thin pipe)</li></ul>

### Video Outputs

4 x HDMI (DVI compatible) supporting resolutions of up to 1600x1200 @ 60 Hz

### Software

<b>Operating System Support</b>	Windows and Linux
<b>Drivers</b>	Supported by standard NVIDIA driver packages
<b>GPGPU Development Tools</b>	NVIDIA's CUDA toolkit supports GPGPU application development

### Mechanical

	Form Factor & Dimensions <sup>(1)</sup>	Weight
<b>Conduction-Cooled</b>	3U VPX REDI per ANSI/VITA 48.2	< 800 g (1.8 lbs)
<b>Conduction-Cooled 2LM</b>	3U VPX REDI 2LM (Two Level Maintenance) per ANSI/VITA 48.2	< 850 g (1.9 lbs)

Notes: (1) Pitch per ordering information

# C530

## GPGPU 3U VPX AI Board



### Power

C530 MXM	Power Consumption
NVIDIA Quadro T1000	50 W
NVIDIA Quadro RTX3000	80 W

### Environmental

Specs per VITA 47

	Conduction-Cooled		
	Commercial	Rugged	Military
<b>Operating Temp.</b>	AC1 (0 to +55 °C) <sup>(2)</sup>	CC3 (-40 to +70 °C) <sup>(2)</sup>	CC4 (-40 to +85 °C) <sup>(1,2)</sup>
<b>Non-Operating Temp.</b>	C1 (-40 to +85 °C)	C3 (-50 to +100 °C)	C4 (-55 to +125 °C)
<b>Vibration</b>	V1	V3	V3
<b>Operating Shock</b>	OS1	OS2	OS2
<b>Altitude</b>	15,000 ft.	35,000 ft.	70,000 ft.
<b>Relative Humidity</b> <sup>(3)</sup>	0 - 95% with Acrylic (Standard),		
<b>Conformal Coating</b>	0 - 100% with Urethane (Optional)		

Notes:


- (1) -55 °C available, contact an Aitech representative for more information
- (2) Operating card edge temperature
- (3) Non-condensing

# C530

## GPGPU 3U VPX AI Board



### Ordering Information

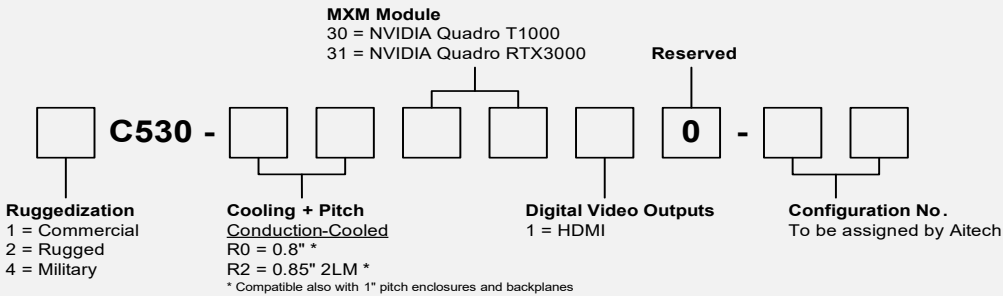

Example: 4C530-R03010-00

### Optional Accessories

RuggedAI™ is Aitech

**TM530** Rear Transition Module (RTM) providing convenient access to C530 I/O interfaces via standard connectors. Supports conduction-cooled C530 when installed in a compatible system.  
See the TM530 datasheet for more information.

### Contact Aitech

Contact your Aitech sales representative for additional product information, and for inquiries regarding customized configurations of the C530 and additional software support.

**Aitech Defense Systems, Inc.**  
Chatsworth, CA, USA  
Toll Free: (888) Aitech-8 [248-3248]  
Direct: +1 (818) 700-2000  
Fax: +1 (818) 407-1502  
Email: sales@aitechsystems.com

**Aitech Systems, Ltd.**  
Herzliya, Israel  
Tel: +972 (9) 960-0600  
Fax: +972 (9) 954-4315  
Email: sales@aitechsystems.com

**Aitech Innovations India PVT. Ltd.**  
Bangalore, India  
Tel: +91 (80) 4866-8105  
Fax: +91 (80) 4866-8106  
Email: sales@aitechsystems.com

[www.aitechsystems.com](http://www.aitechsystems.com)